

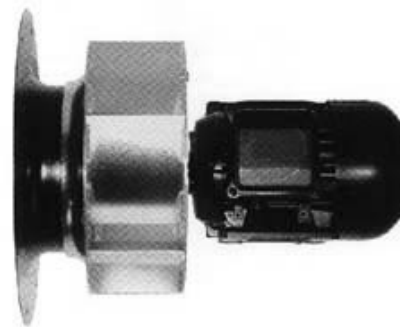


- Typ EEG: enfas, 230V, 50Hz
- Typ DEG: trefas 230/400V, 50Hz
- Skyddsklass IP 55
- Går att få med s.k. temperaturspärri för max+300grC.
- Tillbehör: Frekvensstyrning

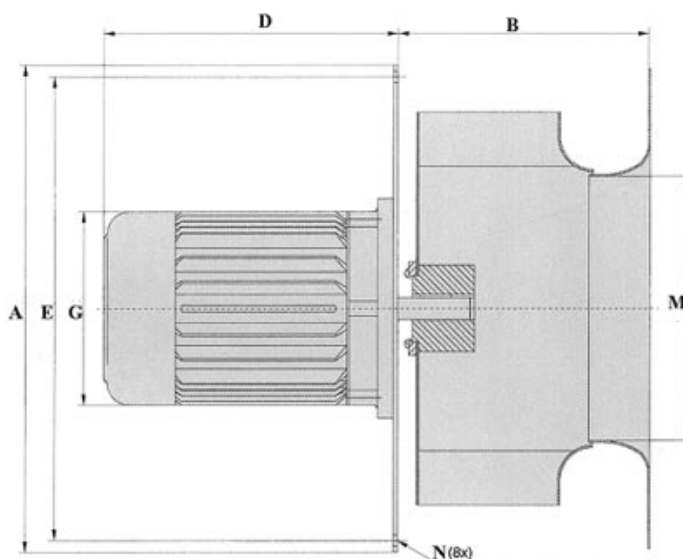

TEKNISKA DATA

Typ	Max.flöde m ³ /h	Max.tryck Pa	Ex.arb.punkt m ³ /h - Pa	Ljud dB (A)	Effekt W	Varvtal r/ min	Max.ström Amp	Vikt kg
EEG 25-90 HLS 70	1900	600	1500 - 300	68	250	2820	1,90	9
DEG 25-90 HLS 70	1900	600	1500 - 300	68	250	2790	0,8	8
DEG 31-112 HLS 70	3900	950	3200 - 500	76	1100	2815	2,5	16
DEG 10-140 HLS 70	8000	1600	6000 - 1100	83	3000	2850	6,7	28

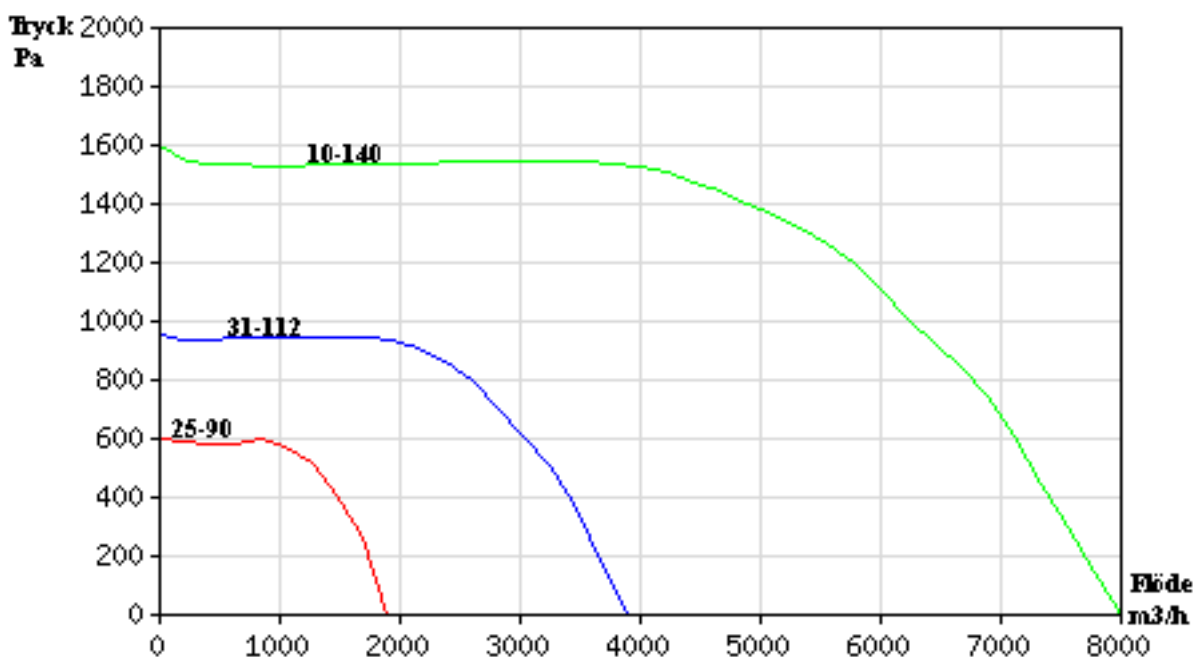

MÅTT mm

Typ	A	B	D	E	F	G	M	N
EEG 25-90 HLS 70	310	162	190	295	306	123	161	7
DEG 25-90 HLS 70	310	162	190	295	306	123	161	7
DEG 31-112 HLS 70	382	204	236	350	382	156	203	7
DEG 10-140 HLS 70	450	253	310	430	464	198	257	7